



Aluminum Emissions Reporting Guidance

Draft for Public Consultation

By Wenjuan Liu (wliu@rmi.org), Sravan Chalasani (schallasani@rmi.org)
April 2023

Contents

- 1 BACKGROUND.....3
 - 1.1 Introduction.....3
 - 1.2 Purpose3
 - 1.3 Principles.....4
 - 1.4 Scope4
 - 1.5 Terminology.....5
- 2 EMISSIONS REPORTING5
 - 2.1 Product Level.....6
 - 2.2 Fixed System Boundary6
 - 2.3 Supply Chain Emissions Transparency.....8
 - 2.4 Primary Data Source9
- 3 EMISSIONS CALCULATION REQUIREMENTS10
 - 3.1 Emissions Calculation Procedure.....10
 - 3.2 Reporting of Scrap-Based Content.....11
 - 3.3 Transparent Reporting of Product Emissions Intensity13
 - 3.4 Energy Impact17
 - 3.5 Exported Products20
 - 3.6 Data Sources.....23
- APPENDIX: Calculation Examples for Section 3.3.3.....31
- ENDNOTES33

1 BACKGROUND

1.1 Introduction

Aluminum is the second most used metal in the economy. It is utilized in various sectors such as construction, electric transmission, transport, and consumer goods. Aluminum also plays a critical role in accelerating the transition to a low-carbon economy given its prominence in clean technologies such as power transmission, solar panels, electric cars, and others.

The aluminum sector is a significant emitter of greenhouse gases (GHGs). It was responsible for more than 1.1 gigaton of carbon dioxide equivalent (Gt CO₂e) in 2018, which is around 2% of global anthropogenic emissions.¹ Current aluminum production heavily relies on fossil fuels for power supply and making anode materials used in aluminum smelting. As a result, the transition to renewable energy sources and low-carbon manufacturing technologies is needed to fundamentally decarbonize the sector.

As environmental, social, and governance (ESG) considerations become a core strategy for companies worldwide, end-users of aluminum who seek to cut carbon emissions from their supply chains, such as electric vehicle, electronic device, and beverage can manufacturers, will drive the demand for low-carbon aluminum. To fulfill this demand, it is necessary for various players in the aluminum supply chain to provide emissions information at the product level against a consistent and transparent method to ensure accuracy and comparability. This allows end-users to confidently purchase aluminum with low embodied emissions and ensure that the purchasing decisions drive sectoral decarbonization in the aluminum industry.

This guidance details the methods for emissions calculation and reporting that aluminum companies can use to provide emissions information in a consistent and transparent manner, and in so doing, meet the demand for low-carbon aluminum.

1.2 Purpose

This guidance serves as a tool for aluminum companies to report emissions in a way that drives industry-wide actions on decarbonization and accelerates the development of a differentiated market for low-carbon aluminum.

The broad intent of the implementation of this tool is to ensure the following:

1. Increase transparency of aluminum product-level emissions with a globally consistent methodology.
2. Credibly recognize aluminum producers leading the market in terms of climate performance.
3. Accelerate the development of essential technologies for net-zero aluminum by ensuring sufficient information is available to link demand with supply.
4. Enable end-users to compare climate performance across supplied aluminum products (of various specifications) to better inform procurement decisions.
5. To aid end-users in purchasing aluminum with credible and transparent climate data so they can demonstrate evidence of climate performanceⁱ to their customers.

ⁱ "Climate performance" here refers to the product-level climate data enabled by this tool. It includes emissions intensity for aluminum ingot,

1.3 Principles

This guidance is developed based on the carbon accounting principles of RMI's Horizon Zero project.² The overarching principle is the need for companies to report emissions at the product level from a specific asset. This is required because purchasing decisions for a material are made at the product level. This guidance seeks to inform such purchasing decisions by providing carbon accounting principles designed to drive industry decarbonization actions.

To enable useful product-level emissions disclosures, three key principles are applied:

1. **Primary data:** As much as possible, emissions calculations should be based on first-hand information from various supply chain partners.
2. **Consistent boundary for comparison:** Companies shall report emissions against a fixed boundary (i.e., a consistent set of processes) to enable comparability and consistency between disclosures.
3. **Measurement made for market:** Ensure calculation and reporting decisions enable the development of a market for low-carbon products.

This guidance provides details specific to the aluminum sector to implement these broad accounting principles.

1.4 Scope

This guidance is intended to be used by any organization that owns and operates aluminum production facilities for primary and recycled aluminum production, as shown in Exhibit 1. For this guidance, "aluminum producers" refer to companies producing aluminum, including liquid aluminum metal, aluminum cast-house products (primary and recycled) in all forms (e.g., ingots, slabs, bars) and aluminum semis in all forms (e.g., foil, sheet, profiles). These aluminum producers shall report their GHG emissions against the fixed boundary shown in Exhibit 1. This includes emissions from bauxite mining facilities, alumina refiners, anode manufacturers, and other processes even if they are not vertically integrated with aluminum smelters and cast-houses. Other actors in the supply chain (such as downstream aluminum purchasers) may use this guidance to request emissions intensity data to better understand supply chain emissions.

The bauxite mines, stand-alone alumina refineries, stand-alone anode manufacturers, and stand-alone semi-fabrication facilities that are not part of any vertically integrated aluminum producers should provide relevant emissions data to their respective buyers but need not report their GHG emissions, as per the whole fixed boundary given in Exhibit 1.

The discussion of emissions in this guidance includes all relevant GHGs with the 100-year time frame for global warming potential (GWP) consideration. For the aluminum industry, carbon dioxide (CO₂), methane (CH₄), nitrous oxide (N₂O), and perfluorocarbons (CF₄ and C₂F₆) are particularly relevant.

emissions intensity for aluminum semi-finished product (if relevant), mine-to-smelter cast-house emissions intensity for ore-based aluminum, share of scrap-based aluminum, post-consumer scrap share, and share of primary data in carbon accounting.

1.5 Terminology

This guidance applies different terms to differentiate requirements, recommendations, and permissible options in line with the Pathfinder Framework.³

Term	Definition
“Shall”	Indicates the rules to be followed by companies applying RMI’s Aluminum Emission Reporting Guidance.
“Should”	Indicates the rules that are recommendations.
“May”	Indicates a permissible option.

2 EMISSIONS REPORTING

The key requirements for reporting in this Aluminum Emissions Reporting Guidance are as follows:

1. Product-level: Emissions must be reported at the product level for an individual site.
2. Fixed boundary: All emissions from a set of processes must be reported irrespective of whether the company has ownership or control of these processes.
3. Supply chain transparency: Additional reporting of emissions related to primary metal and scrap input. This provides some context for the overall emissions footprint. Additional reporting on the type of scrap used provides more context related to recycled content.
4. Primary data source: Emissions disclosures must include the share of the emissions footprint based on primary data.

Following these key requirements, the metrics reported for each product are given below. This data shall be reported on an annual basis at the asset level.

- **Benchmarking footprint:** The overall emissions footprint for the aluminum product as per the benchmarking boundary, in ton CO_{2e} per ton of aluminum ingot (refer to [Sections 3.1](#) and [3.3](#)).
- **Full footprint** (if relevant): The overall emissions footprint for the aluminum product as per the full reporting boundary, in ton CO_{2e} per ton of aluminum semis (refer to [Sections 3.1](#) and [3.3](#)).
- **Mine-to-smelter cast-house emissions intensity** (if relevant): The overall emissions intensity for primary aluminum, in ton CO_{2e} per ton of primary aluminum (refer to [Section 3.3.2](#)).
- **Share of scrap-based content:** The share of scrap-based input used to generate the product as per the benchmarking boundary and further disclosure of the share of post-consumer scrap separately (refer to [Section 3.2](#)).
- **Share of primary data:** The share of primary data used to calculate the overall emissions footprint for the full reporting boundary (refer to [Section 3.6.5](#)).

The reporting responsibility lies with the facility that produces final cast-house products (i.e., value added products (VAPs) such as slabs, billets, foundry alloys, wire rods, and other specialty products) used in semi-fabrication processes (such as rolling, extrusion, and foundry casting). The facility with the final cast-house has to collect the necessary emissions information from its suppliers, metal traders, and other supply chain partners. If the final cast-house is not integrated with semi-fabrication facilities, it reports the metrics to the semi-fabrication facility, which then reports the data to its downstream buyers. If the final cast-house is integrated with semi-fabrication facilities, this facility reports all the required metrics to its buyers. In addition, all supply chain partners bear the responsibility to provide relevant emissions information to their downstream buyers (refer to [Section 1.4](#)).

2.1 Product Level

The reporting in this guidance enables the emissions information to flow alongside the product and accumulate as products are moved (and transformed) along a supply chain. This enables each actor in the supply chain to accurately understand the embodied emissions of both purchased and sold products. This can help companies set informed net-zero targets and take effective decarbonization actions.

To achieve this, companies shall report emissions of aluminum on the product level for each asset. This reporting is to be done by aluminum final cast-house products against the benchmarking boundary and aluminum semi-finished products against the full boundary. The emissions intensity calculations shall be based on details given in [Section 3](#) and in line with the other reporting requirements outlined in this section.

2.2 Fixed System Boundary

The fixed boundary defines all the process steps to report emissions irrespective of an aluminum producer's ownership structure. This approach solves two key problems:

1. **Corporate-level emissions disclosure varies depending on the degree of vertical integration.** In the aluminum industry, vertical integration can extend to emissions-intensive processes such as lime calcination or anode production. If these processes are operated and owned by an aluminum producer, emissions will be included in Scope 1 (according to GHG Protocol⁴). For non-integrated producers, the same emissions would count as Scope 3, which may not be reported, presenting challenges in comparing GHG emissions at the corporate level across the sector.
2. **Changes in the sector required by the energy transition may result in emissions shifting between Scopes 1 and 2.** For example, as the need for decarbonizing power generation increases, smelters operating/owning fossil-based captive powerplants may consider procuring green electricity or relocating to renewable-rich regions and connecting to grids. In these cases, emissions may shift from Scope 1 (self-generated electricity) to Scope 2 (grid-purchased electricity).

Exhibit 1 shows the fixed boundaries against which reporting is to be done in this guidance. These reporting boundaries are designed in accordance with aluminum sectoral 1.5°C decarbonization pathways to help track sectoral decarbonization progress.⁵ To enable comparison among products, the benchmarking boundary is defined to include processes from mining to

the final cast-house. The last casting process yields the final cast-house products, including slabs, billets, wire rods, foundry alloys, and other specialty products ready for further semi-fabrication processes. All final cast-house products will require emissions reporting against the benchmarking boundary for comparability.

If the aluminum products also require further processing (e.g., rolling, extrusion, foundry casting), emissions from these processes shall be added to report the overall emissions intensity for the full boundary.


This guidance excludes alloying emissions (i.e., emissions from alloying process and embodied emissions of alloy metals) from the boundaries when calculating the emissions intensity to ensure emissions comparability. However, given that certain alloy metals are emissions-intensive, this guidance provides guidelines for calculating alloy emissions ([Section 3.3.4](#)) and recommends reporting it as an optional metric separately. This conforms to the needs of supply chain actors interested in alloy emissions.

Emissions related to transport activities are also excluded from both the boundaries because this guidance is focused on the decarbonization of the aluminum sector. Aluminum producers are encouraged to refer to other transportation sector guidance, such as [the Global Logistics Emissions Council \(GLEC\) framework](#) to account for these emissions.⁶

In summary, this guidance sets two boundaries for distinct purposes:

- **The benchmarking boundary**, which includes all relevant processes from bauxite mining to final cast-house, ensures comparability between aluminum products with different specifications.
- **The full boundary** includes all relevant processes from bauxite mining to semi-fabrication to capture cradle-to-gate emissions. This accounts for emissions from the semi-fabrication processes and the increasingly important role of material efficiency in determining the overall emissions intensity.

Exhibit 1: Fixed System Boundary for Aluminum Emissions Reporting

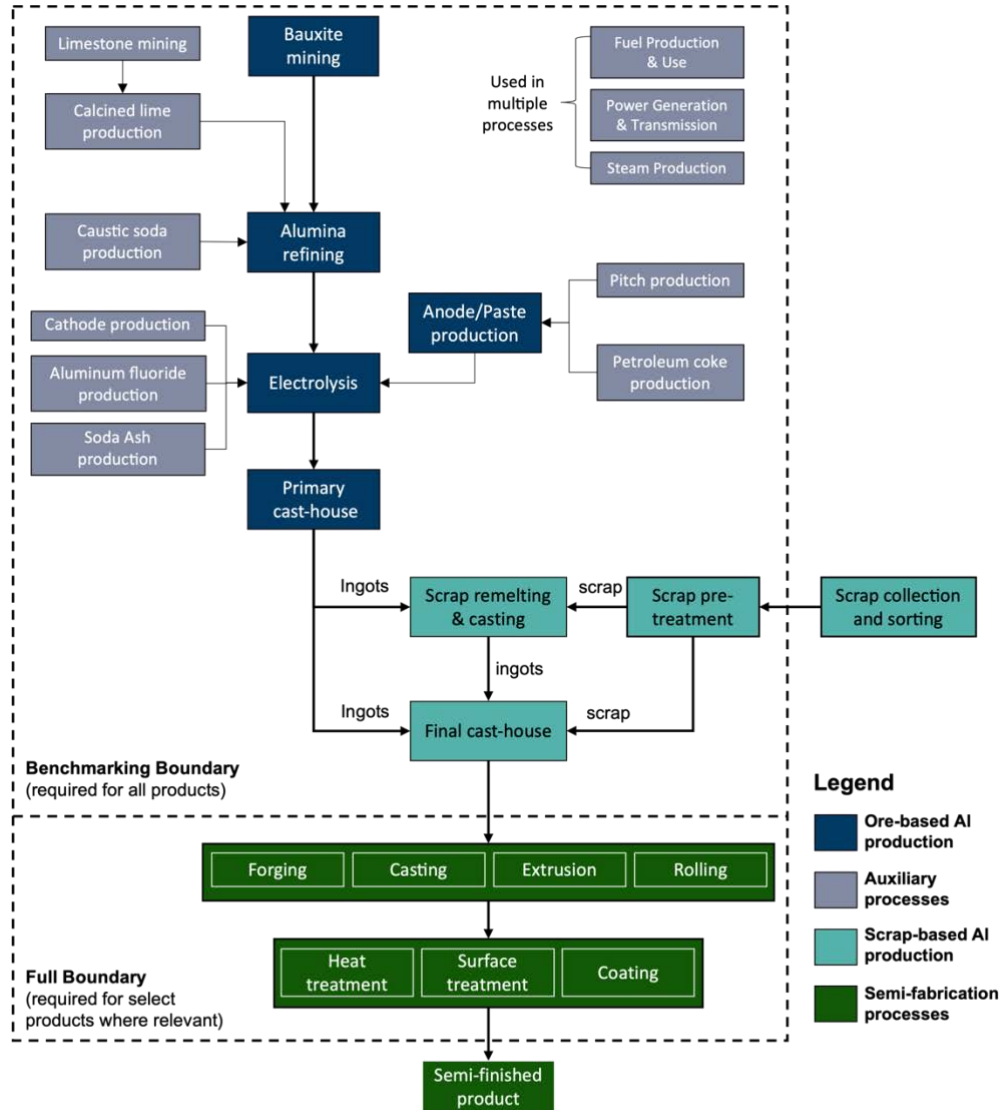

Note:

- **Fuel** includes all the solid, gas, liquid fuels used in the production.
- **Input production** (e.g., Soda Ash production) refers to the cradle-to-gate emissions of inputs.
- **Final cast-house** is the same as semi-fabrication ingot cast-house. It is the last casting process producing billets, slabs, sows, ready for semi-fabrication.

2.3 Supply Chain Emissions Transparency

Aluminum is currently produced in two ways: ore-based (primary) and scrap-based (recycled). Primary aluminum is produced mainly from the bauxite obtained from bauxite mines and refined to alumina through the Bayer process. This alumina is then converted to liquid aluminum by the Hall-Héroult electrolysis process, which uses electricity to break the strong chemical bonds between aluminum and oxygen. Recycled aluminum is produced by remelting and refining end-of-life scrap, scrap from aluminum rolling/forming/other semi-fabrication processes, and scrap from downstream fabrication. Primary aluminum ingot

may be added in the remelting process to produce recycled aluminum. There is no functional difference between primary and recycled aluminum in final products, except that primary aluminum provides more flexibility for making alloys.

GHG emissions intensity significantly differs between primary aluminum and recycled aluminum. Emissions from recycled aluminum production are around 6% of that from primary aluminum production.ⁱⁱ Such variability makes recycled aluminum the fastest and an effective way to reduce emissions across the sector in the near term. However, its overall potential of emissions reduction is constrained by scrap availability. The International Aluminium Institute (IAI)'s 1.5°C pathway maintains that recycled aluminum is anticipated to meet only 50%–60% of the total demand by 2050 under several scenarios.⁷ Due to constrained supply, it is impossible to completely decarbonize the aluminum sector using only recycled aluminum. It will also be necessary to invest and deploy decarbonization technologies in the primary production route. Furthermore, the limited supply of aluminum scrap may indicate that producing more aluminum from scrap will reduce the scrap available for future uses, resulting in no additional reduction of the sector's emissions.

To overcome this challenge, aluminum producers shall disclose the emissions intensity of primary aluminum used in the final cast-house products. Primary metal ingots and scrap are usually mixed in the ingot casting processes. This makes it difficult for end-users to compare the climate performance across products, especially if they are made with different shares of primary aluminum and scrap. Therefore, aluminum producers shall estimate and report the mine-to-smelter cast-house emissions intensity value for the primary aluminum input to improve the emissions transparency. This helps differentiate low-carbon aluminum produced using low-emissions technologies (e.g., renewable energy, inert anode) and prevents aluminum producers from competing for scrap to reduce the emissions intensity of their products.

Decarbonization of the aluminum industry also requires the elimination of pre-consumer scrap and improved recycling of post-consumer scrap. Pre-consumer scrap and post-consumer scrap are usually mixed in the remelting process and not disclosed separately. This hampers the ability of end-users to drive change in aluminum recycling. Therefore, aluminum producers shall disclose the share of scrap-based inputs using a consistent method, along with a separate disclosure of post-consumer scrap. The specific emissions intensity calculation procedure and definition of scrap-based content are provided in [Section 3.2](#).

2.4 Primary Data Source

To ensure that purchasing decisions based on emissions performance of different aluminum products drive investments in low-emissions technologies, it is necessary to use primary data to estimate the various reported metrics. Primary data refers to data provided directly by the entity responsible for those emissions (i.e., Scope 1 or 2 emissions of these entities).

Aluminum companies shall report the share of emissions calculated using primary data. This may require the companies to request the share of primary data used in emissions estimates from upstream suppliers. The method for companies to calculate the share of primary data is provided in [Section 3.6.5](#).

ⁱⁱ Emissions from recycled aluminum production refers to the emissions related to scrap pre-treatment, remelting, and casting emissions.

3 EMISSIONS CALCULATION REQUIREMENTS

3.1 Emissions Calculation Procedure

The calculation procedure for process-level emissions is adapted from the reporting documents from IAI, which are the commonly used guidance by the aluminum industry. Specifically, this guidance incorporates the following:

- The Aluminum Sector Greenhouse Gas Protocol⁸
- Aluminum Carbon Footprint Technical Support Document⁹
- Good Practice Guidance for Calculation of Primary Aluminium and Precursor Product Carbon Footprints v2¹⁰
- Good Practice Guidance: Measuring Perfluorocarbons¹¹
- Reference Document on Carbon Footprint Calculations of Aluminium Scrap¹²

In general, the overall emissions should be calculated by dividing them by the mass of aluminum produced to calculate the emissions intensity value.

$$E_{CO_2} = \sum_{t=1}^N EF_{t,d,CO_2} \times Q_{t,d,CO_2} + \sum_{t=1}^N EF_{t,i,CO_2} \times Q_{t,i,CO_2} - \sum_{t=1}^N EF_{t,s,CO_2} \times Q_{t,s,CO_2}$$

where

- t, from 1 to N, refers to each emissions source (i.e., fuel, energy, or other input).
- EF refers to emission factors.
- Q refers to site quantity.
- d, i, and c refer to direct, indirect, and subtracted emissions, respectively. These direct, indirect, and subtracted emissions are defined as follows:
 - Direct: This refers to carbon emissions from production process reactions (for example, reaction at carbon anode) and use of fuel sources and on-site electricity generation where the emissions factor is defined based on the carbon intensity of that fuel source/electricity generation. This also includes perfluorocarbon (PFC) emissions from aluminum production processes.
 - Indirect: This refers to emissions outside of the corporate boundary of an aluminum producer, such as embodied emissions of anode materials, ancillary process emissions outside of the aluminum producer boundary, generation emissions for purchased power, and upstream emissions for fuels and electricity used during aluminum production. Despite being outside an aluminum producer's boundary, these emissions need to be included as part of the fixed boundary (refer to [Section 2.2](#)). These emissions should be determined by the relevant supply chain partner and the data should be transferred to the aluminum producer. Where this is impossible, average emissions factors can be used. However, the use of average emissions factors affects the share of primary data, weakening data reliability. For efficient facilities and processes, this can possibly lead to overestimation of emissions (refer to [Section 3.6.4](#)).

- **Subtracted:** This refers to emissions that should be subtracted from the emissions estimate and applies only to emissions not relevant to the production of aluminum at that site (e.g., sold intermediate products). Refer to [Section 3.5](#) for details.

The required emissions sources and associated emissions factors for direct and indirect are provided in [Section 3.6](#), details on calculating electricity-related emissions in [Section 3.4](#), and categories and emissions factors for exported products in [Section 3.5](#).

3.2 Reporting of Scrap-Based Content


3.2.1 Definition of scrap-based content

The metallic input of aluminum products is sourced from either bauxite ore or scrap. Scrap can be further categorized into pre-consumer scrap and post-consumer scrap. Different industry associations categorize scrap differently. In this document, scrap is defined based on IAI's draft document on how to treat scrap flow in carbon footprint calculations for aluminum products and shown in Exhibit 2:¹³

- **Internal scrap:** Also called run-around scrap or home scrap, this is generated at the casting step of the remelting process and reintroduced to the same remelting process.
- **Pre-consumer scrap:** This is material containing aluminum that is diverted from the waste stream from a manufacturing or similar process. This pre-consumer material is unfit for end use and cannot be reclaimed within the same process that generated it. This includes both the scrap generated at the same site that produces aluminum (including aluminum recycled from dross or other aluminum containing waste) and the fabrication scrap produced outside of the aluminum producer through downstream manufacturing processes.
- **Post-consumer scrap:** This is recovered from aluminum containing products that have reached their end of life (e.g., recycling of aluminum from used beverage cans).

The definitions of pre-consumer scrap are unclear in ISO standards, leaving room for interpretation.¹⁴ A major discrepancy is related to whether the scrap generated at the semi-fabrication process and reintroduced back to the co-located remelting process (i.e., scrap 3 in Exhibit 2) should be defined as pre-consumer scrap. In this case, the definition of pre-consumer scrap is tied to the integration level of the semi-fabrication process (i.e., whether the remelting/casting and semi-fabrication processes are part of the same company). This inconsistency has created confusion and compromised comparability across aluminum products. Harmonizing the definition of scrap flow is beyond the scope of this guidance, but it aims to improve cross-product comparability by decoupling the definition of pre-consumer scrap from the facility integration level.

Exhibit 2: Example of Different Scrap Flow

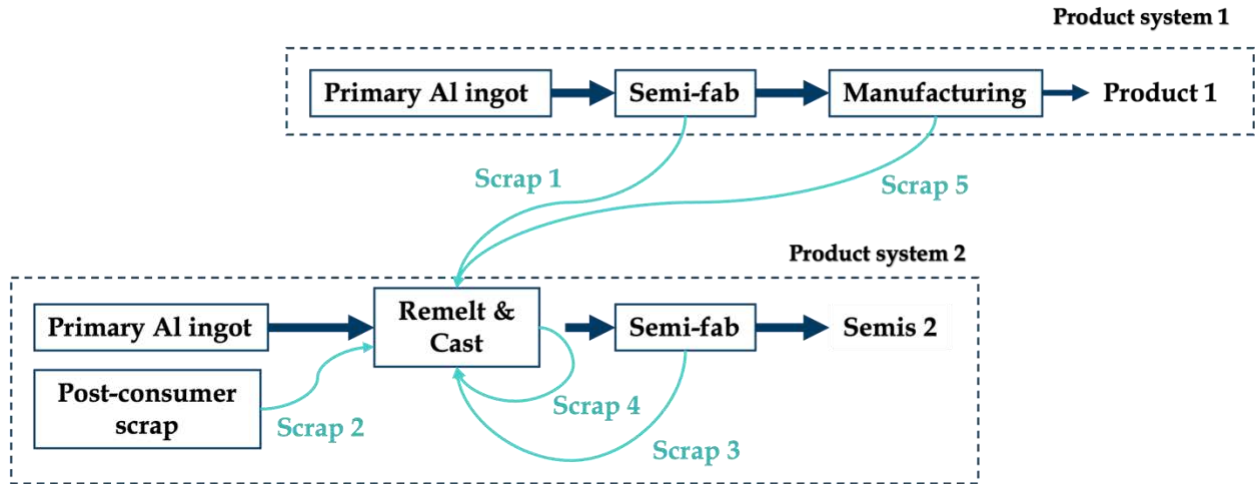

Scrap Flows	ISO Recycled Content Definition	IAI Aluminum LCA Definition	Horizon Zero AI Guidance Definition
Scrap 1	Pre-consumer scrap	Process scrap	Pre-consumer scrap
Scrap 2	Post-consumer scrap	Post-consumer scrap	Post-consumer scrap
Scrap 3	Pre-consumer scrap (depending on the definition of a process)	Inside Scrap	Pre-consumer scrap
Scrap 4	Not pre-consumer	Inside scrap	Not pre-consumer (Internal scrap)
Scrap 5	Pre-consumer scrap	Process scrap	Pre-consumer scrap

Adapted from IAI reference document on scrap flow¹⁵

3.2.2 Share of scrap-based content

The calculation of the share of scrap-based content in this guidance specifically applies to the benchmarking boundary and its product (i.e., final cast-house products). To simplify the calculation, this guidance defines any pre- or post-consumer scrap (either traded or not) as scrap-based input. Any scrap sold by the site shall be subtracted from the total scrap-based input to ensure that sold internal scrap is not counted. The share of scrap input shall be calculated at every process step that pre- or post-consumer scrap is added (i.e., every melting step, if there are multiple melting steps involved in the manufacture of the final cast-house product). Specifically, the share of scrap-based input shall be calculated as follows:

$$\text{Share of scrap – based content} = \frac{M_{Scrap}}{M_{Scrap} + M_{Primary}}$$

or

$$\text{Share of scrap – based content} = 1 - \frac{M_{Primary}}{M_{ingot}}$$

where M_{scrap} is the mass of scrap (defined as mass of pre- and post-consumer scrap minus the mass of sold scrap). $M_{primary}$ is the mass of primary aluminum in either solid or molten form with minimum 99.7% aluminum purity. M_{ingot} is the mass of aluminum ingot.ⁱⁱⁱ

3.2.3 Share of post-consumer scrap

Recycling and using post-consumer scrap reduces the need for extracting bauxite ore for aluminum production. This can result in significant environmental benefits. Recycling and resource efficiency is identified as one of the pathways toward achieving a 1.5°C aligned aluminum sector.¹⁶ It requires the increase of post-consumer scrap recycling along with the usage and minimization of pre-consumer scrap. Post-consumer has low collection rates and low quality as it is mixed with other scrap.

To improve the recycle and use of post-consumer scrap, this guidance requires the disclosure of post-consumer scrap share as a key product metric. Along with disclosing the share of total scrap-based content, aluminum producers shall report the share of aluminum input from post-consumer scrap, calculated as follows:

$$\text{Share of post – consumer scrap} = \frac{M_{\text{post-consumer}}}{M_{\text{primary}} + M_{\text{scrap}}}$$

Defining the share of post-consumer scrap may be challenging considering post- and pre-consumer scrap can be mixed during the collection and distribution of scrap. Producers should first take efforts to improve recycling transparency by requesting primary information from scrap traders or suppliers. If a data gap still exists, producers may refer to the IAI [regional default conversion factors](#) to estimate the post-consumer scrap share of their scrap input based on the location from which their scrap is sourced.¹⁷

The Horizon Zero aluminum working group generally acknowledged the importance of investing in post-consumer scrap collection and recycling but did not reach a consensus on the need for separate reporting on post-consumer scrap share.

3.3 Transparent Reporting of Product Emissions Intensity

3.3.1 General calculation principles

In general, companies shall use the following principles to determine emissions associated with producing aluminum products. These principles broadly align with the guidelines in the IAI documents listed in [Section 3.1](#).

- The product-level metrics shall be calculated and reported for a given asset (a production site). If a company has multiple assets, the relevant product metrics shall be separately calculated and reported for each asset.
- Product emissions shall comprise all GHG emissions for all processes included in the fixed boundaries in Exhibit 1. This encompasses process direct emissions, upstream and combustion emissions of thermal fuels, life-cycle emissions of electricity, and cradle-to-gate emissions of ancillary materials.

ⁱⁱⁱ This refers to all products from the ingot casting process, including ingots, slabs, billets, and primary foundry alloys.

- Product emissions intensity shall be normalized based on the final output for each fixed boundary and reported as t CO₂e/t output. For example, the benchmarking footprint of the final cast-house slabs shall be calculated as total emissions divided by total output of slabs. Similarly, the full footprint for semi-finished products shall be calculated as total emissions divided by total output of semi-finished products.
- For product systems involving the use of primary ingots in the remelting or refining process (e.g., in the manufacture of slabs), companies shall also report the emissions intensity of primary aluminum covering mine-to-smelter cast-house emissions. More details are provided in [Section 3.3.2](#).
- For product systems involving scrap (pre-consumer or post-consumer), benchmarking footprint (i.e., mine-to-final cast-house) shall be calculated using both the cut-off approach and co-product allocation approach. Refer to [Section 3.3.3](#) for more details.
- Alloy emissions are excluded from the fixed boundaries for comparability in this guidance. However, relevant guidelines are provided in [Section 3.3.4](#) to encourage companies to report it as an optional metric separately.
- The GHG emissions associated with intermediate products within the aluminum supply chain and exported energy shall be subtracted from the emissions calculation to reflect the actual emissions of the final product. More instructions are listed in [Section 3.5.1](#) for intermediate products and [Section 3.5.3](#) for exported energy.
- By-products/waste cannot be credited in the emissions calculation. Refer to [Section 3.5.2](#).
- Emissions benefits from sourcing renewable energy shall not be allocated across a specific product portfolio to reduce greenwashing risks. For more details, refer to [Section 3.4](#).
- If market instruments of sourcing renewable energy need to be involved in aluminum production, companies shall first check the criteria for high-quality market instruments to get a broad idea of whether the involved instrument is credible. Next, companies can follow the decision-making hierarchy to decide which renewable energy mechanism suits them best. More details are given in [Section 3.4](#).
- This guidance recommends reporting electricity impact using both location-based and market-based methods. If only one method is used, the reporting entity shall specify the method selected.

3.3.2 Emissions transparency of primary production

Primary aluminum production requires a substantial amount of energy. Many primary smelters still rely on fossil fuels and fossil-powered electricity, contributing to most of the sector's emissions. Although shifting to recycling has considerable decarbonization opportunities, the supply of scrap is constrained and would only meet approximately 54% of the global demand for aluminum in 2050.¹⁸ As a result, achieving the sector's decarbonization goals will inevitably require a focus on reducing emissions in primary production. This can be achieved through low-carbon power and deployment of zero-emission technologies.

Improving emissions transparency of primary aluminum production plays a critical role in driving sectoral decarbonization actions. This guidance contributes to it by requiring additional reporting of mine-to-smelter cast-house emissions intensity for products with primary metal as input. It would help climate-leading producers better demonstrate their efforts of decarbonizing primary production. It also provides investors and end-users with transparent and credible metrics to understand an individual aluminum supplier's progress on sectoral decarbonization.^{iv}

^{iv} This refers to 1.5°C climate-aligned pathways developed by MPP and IAI for primary aluminum production.

For mine-to-smelter cast-house emissions intensity, producers shall calculate all the direct and indirect emissions related to mining, alumina refining, anode production, smelting, and primary casting, including emissions from ancillary processes and materials. Aligned with benchmarking footprint and full footprint calculations, transport and alloying emissions are excluded. If scrap is added in primary cast-house and requires additional fuels for remelting, emissions related to additional fuels may be estimated by the energy demand for remelting the amount of additional solid scrap and can be deducted from mine-to-smelter cast-house emissions intensity. These emissions shall be added back to product emissions intensity calculations for both benchmarking and full boundaries.

3.3.3 Product-level calculation

The calculation of product-level emissions footprint shall follow the principles in [Section 3.3.1](#) for both the benchmarking system and full system boundary (if relevant). There is a growing debate within the aluminum industry on whether embodied emissions should be associated with scrap, specifically for pre-consumer scrap. Typically, post-consumer scrap is considered burden-free in cradle-to-gate product carbon footprint (PCF) calculations as it has served its intended use and reached its end of life. However, for pre-consumer scrap flow, there is no broad agreement on whether emissions should be assigned. This affects comparability and consistency between disclosures. IAI has taken efforts to improve transparency in scrap emissions by publishing a [reference document](#) to enhance and align industry-wide understanding of common methods for scrap embodied emissions.¹⁹ Aluminum producers are recommended to refer to the reference document for more details.

In general, cut-off, co-product allocation, and substitution (avoided burden) are mainly used to incorporate pre-consumer scrap emissions in PCF calculations. These methods are considered valid in ISO standards and are fundamentally different in the assumptions about the function of pre-consumer scrap flow (i.e., as waste, co-product, or secondary material).

The widely used cut-off approach of treating pre-consumer scrap burden-free (i.e., having zero embodied emissions) requires the lowest calculation effort but creates limited incentives for post-consumer scrap recycling. It may risk creating circumvention opportunities or unintended competitive advantage for pre-consumer scrap produced by fossil fuels.

Co-production allocation and substitution (avoided burden) methods assign some emissions to pre-consumer scrap. They require a more complex calculation procedure that often necessitates a certain level of traceability of the origin and destination of scrap flow. Both methods offer emissions incentives to differentiate pre- and post-consumer scrap types. This further drives industry actions on improving post-consumer scrap recycling and low-carbon primary production.

The following considerations explain some nuances regarding scrap embodied emissions:

- Existing policies may require how process scrap should be modelled for cradle-to-grave life cycle assessments (LCAs), but they do not have explicit requirements and implications for cradle-to-gate analysis.
- Co-product allocation has low uncertainty in emissions leakage (i.e., scrap generator allocates its actual process emissions to scrap, and it is easier for scrap users to trace it back from its suppliers than tracing down to buyers).
- The co-product allocation approach provides more differentiation among pre-consumer scrap types generated from aluminum with various emissions intensities.
- Across the world, many aluminum producers still use the cut-off method. If a new method is chosen, producers need time to transition. This approach supports a gradual phaseout of the cut-off method as the market evolves.

Therefore, this guidance requires reporting of benchmarking PCF using both cut-off approach and co-product allocation approach. Practitioners should refer to the guidelines in the next sections regarding PCF calculations for cut-off and co-production allocation methods to ensure consistency and no carbon leakage.

Cut-off method

This approach requires companies generating pre-consumer scrap to attribute all production emissions to their main end-products in PCF calculations. Zero emissions are assigned to the generated process scrap. When reused, scrap users also treat such scrap as zero emissions in their subsequent PCF calculation. Companies can refer to the example in the [Appendix](#) for a sample calculation. In practice, scrap users shall confirm with their scrap suppliers to ensure that no emissions burden is placed on their scrap to avoid carbon leakage and ensure consistency.

Co-product allocation method

This approach specifically refers to the mass-based allocation of material production impact.^v It requires allocating the impact of primary material production between the main product and scrap on the basis of the mass of each material generated during production. For example, consider the simplified product system 1 in Exhibit 2. Emissions for semi-fabrication scrap (scrap flow 1) should be determined by allocating emissions from primary aluminum ingot production based on the mass of semis product and scrap flow 1. Specific calculation examples can be found in the [Appendix](#).

This calculation often requires a comprehensive understanding of the material flow and unit process emissions at the facility generating the scrap. When implementing this method, practitioners (especially scrap users) often face challenges in tracing scrap flow and understanding the actual impact of primary material production, especially if multiple scrap flows are involved. To alleviate the calculation complexity and ensure integrity, this guidance recommends the following decision hierarchy:

- Scrap generators should prioritize using primary data for material flow and primary aluminum production emissions. If scrap generators purchase primary ingots through suppliers, the emissions intensity data should be collected from the suppliers. The scrap embodied emissions can be estimated following the reporting tool provided along with this guidance. The [IAI reference document and tool](#) for the CP0 approach can also be used.²⁰ Scrap users should prioritize requesting relevant information from their scrap suppliers/traders.
- If the suggested primary data is unknown, scrap users should take efforts to trace the input composition and usage of primary metal involved in the scrap generation process. The goal is to trace the primary metal into the process that originally generated the scrap.^{vi}
 - When the process generating scrap has more than 50% primary aluminum as input materials, scrap users may employ the corresponding emissions intensity value of primary metal as a proxy for scrap embodied emissions.

^v Please note that there are different variations in co-product allocation method, and the specific requirements recommended here are aligned with the CP0 approach in the IAI [reference document, https://international-aluminium.org/resource/public-review-guidelines-on-transparency-aluminium-scrap/](https://international-aluminium.org/resource/public-review-guidelines-on-transparency-aluminium-scrap/).

^{vi} This may extend to multiple sources of primary metal, where a weighted average of the emissions intensity values of the primary metal involved should be applied to reflect scrap embodied emissions.

- When the process generating scrap has more than 50% of external purchased pre-consumer scrap as input materials, scrap users are recommended to trace the associated intensity value of the primary metal when scrap is originally produced.
- If the primary data from scrap suppliers is unavailable, scrap users shall use the default emissions factors provided by IAI based on the sourcing region of scrap to fill the data gap.
- Scrap generators shall confirm with their scrap buyers/users and ensure that the associated emissions burden is correctly added to their product PCFs to avoid carbon leakage and ensure consistency.

Recognizing the challenges of these calculations, this guidance encourages both scrap generators and users to start such calculation exercises soon. This incentivizes the development of traceability systems and technology. Overall, this guidance recommends dual reporting of both PCFs (cut-off and co-product allocation) to drive more industry actions urgently needed to decarbonize primary aluminum production and improve end-of-life collection and recycling.

The Horizon Zero aluminum working group did not reach a consensus on the single methodology to be recommended for treating pre-consumer scrap emissions in this guidance. Debates were mainly centered on the ability of each method to drive industry-wide decarbonization actions and the traceability challenge that may pose carbon leakage risks. Thus, after consulting with working group members, we proposed this dual reporting as a practical solution to ensure transparency, alignment, and harmonization in this contentious topic.

3.3.4 Alloy emissions

Although not included in the fixed boundaries, this guidance recognizes that alloying emissions can be material to the cradle-to-gate PCF of an aluminum product. Certain alloy metals such as silicon, magnesium, manganese, and copper are emissions intensive. This guidance recommends aluminum producers to calculate emissions associated with alloying, including process emissions and embodied emissions of alloy metals, and report it as a separate metric in the tCO_{2e} alloying emissions/t Al product. To calculate embodied emissions of alloy metals, producers are recommended to source primary data from their suppliers. If the primary data is unavailable, producers may refer to the [IAI Scope 3 Calculation Guidance Document](#) for relevant alloy emission factors.²¹

3.4 Energy Impact

The calculations of energy impact required by this framework are aligned with IAI's [Aluminium Carbon Footprint Good Practice Guidance](#) as well as guidance for other sectors under the Horizon Zero project.²² For the different fuels used by aluminum producers in various processes, they shall report emissions tied to both upstream production (i.e., cradle-to-gate emissions) and consumption of those fuels.

For fuels (solid, liquid, gas) used on-site in the production of aluminum, producers should determine a site-specific emissions factor (for emissions from fuel consumption) based on the carbon content of specific fuels used. Where this is impossible, the standard emissions factors for various fuel types are provided in [Section 3.6.2](#). For upstream production emissions of fuels, aluminum producers are encouraged to request site-specific emissions factors that shall include all GHG emissions associated

with fuel extraction and production (including fugitive methane emissions) from their fuel provider. Other data sources and methods for determining upstream production emissions and fugitive methane emissions can be found in [Section 3.6.4](#).

For electricity impact, this guidance requires reporting life-cycle emissions of electricity consumption for both purchased and self-generated. This includes emissions from the extraction and production of fuels, the combustion of fuels for electricity generation, and transmission and distribution (T&D) losses. Aluminum producers shall prioritize using site-specific emissions factors associated with the electricity used at the facility. They can also calculate site-specific estimates of the emissions factors following [IAI's Goods Practice Guidance](#).²³ If site-specific emissions factors are impossible, regional or national emissions factors are provided in [Section 3.6.3](#) of this guidance.

3.4.1 Purchased electricity and heat

Emissions reporting for purchased electricity and heat

The [GHG Protocol Scope 2 Guidance](#) provides two methods (location-based and market-based) for determining an electricity emissions factor.²⁴ It encourages companies to report purchased electricity emissions using both methods as each provides different information.

For reporting using this guidance, reporting entities are recommended to calculate PCFs using both methods. If only one method is used, the selected method shall be disclosed in a clear and transparent way. Aluminum producers shall obtain the relevant emissions factor (life-cycle emissions factor) from the electricity supplier. Otherwise, life-cycle emissions factors at the regional or national level can be used (see [Section 3.6.2](#)).

Sourcing renewable energy

Power decarbonization is the most critical decarbonization pathway for the aluminum industry. Considering the significant amount of electricity demand by electrolysis process, aluminum smelters shall follow this hierarchy when deciding power purchase/transition options to best drive decarbonization:

- Physical transition is prioritized for assets with self-generation facilities (on- or off-site) to shift from fossil fuel to renewable energy.
- If market-based mechanisms are needed, producers shall prioritize these options:
 - Purchase from on-site installations owned by a supplier and directly delivered to the reporting company (through or not through the local grid).
 - Direct sourcing from an off-site generator with no-grid transfers.
 - Direct procurement from offsite grid-connected generators (e.g., power purchase agreements) that are in the same grid as the purchaser.
 - In the above options, the renewable generation project shall not participate in other Energy Attribute Certificate (EAC) programs.

- When other options are unavailable, producers may use unbundled EACs. In this case, producers shall have an internal policy to ensure that industry best practices are followed for the purchase of EACs.^{vii}

If market instruments must be used, aluminum producers are encouraged to use high-quality ones in sourcing renewable energy for emissions reduction. When determining if a market instrument option is of high quality, aluminum producers shall refer to the following criteria:

- **Additionality:** The procurement directly adds new renewable energy capacity to the grid.
- **Regional support:** The procurement is physically linked to the electricity generated in the same grid as the purchaser.
- **Long-term commitment:** The procurement belongs to a long-term contract or has measures to ensure long-term financial support to specific renewable energy projects.

Producers beyond smelters are also encouraged to follow the same criteria and decision hierarchy in sourcing renewables. With the principle of transparency and avoidance of double-counting, any EACs issued by the above cases shall be retained or retired by the reporting producer or on the producer's behalf. Aluminum producers shall acquire the emissions factors for the contractual amount of energy from the specific generation facility and the associated energy mix. If aluminum producers claim to use renewable energy for their electricity needs, their power supply contracts, EACs (e.g., Renewable Energy Certificates (RECs), Guarantees of Origins (GOs), and other such certificates), or meter readings shall constitute enough proof of the renewable energy claim.

3.4.2 Self-generated electricity and heat

Aluminum producers who own and operate an on-site electricity generation plant shall possess the relevant emissions factor for self-generated energy. If not, they can estimate custom emissions factors following the methodology of [IAI's Goods Practice Guidance](#).²⁵ Emissions from upstream production of fuels used for power generation shall follow the same method used for calculating upstream emissions of on-site fuels.

In many cases, some share of self-generated electricity (and/or steam) is sold to other users or power companies (steam may be sold for district heating). The emissions associated with the sold electricity/steam shall be accounted for based on the method described in [Section 3.5.3](#) of this guidance.

3.4.3 Allocation of renewable energy credits

This guidance does not recommend using the mass balance approach to allocate emissions reduction of renewable energy across a product portfolio to drive long-term decarbonization actions and full asset transition to renewable power. Emissions benefits from sourcing renewable energy shall be calculated at the site level and distributed equally across products. For smelters partially sourcing renewable power due to limited accessibility, producers may utilize qualitative technology label (e.g., 50% of the electricity used for this product is from solar power) for better demonstration of decarbonization efforts.

^{vii} Industry best practices here refer to actions or plans to ensure the purchase of unbundled EACs meet the three criteria of high-quality market instruments.

Note that the idea of a “technology label” was not discussed in the Horizon Zero aluminum working group. To further accelerate the development and adoption of low-carbon technologies in the aluminum industry, this guidance introduces it here to receive broad feedback.

3.5 Exported Products

3.5.1 Intermediate products used in the aluminum supply chain

A few intermediate products within the aluminum supply chain are not used in the production of aluminum. The GHG emissions associated with such intermediate products within the aluminum supply chain shall be subtracted from the emissions calculation to ensure that the reported emissions are only from the processes responsible for the production of aluminum.

The most common intermediate products not used in the production of aluminum are non-calcined hydrates from alumina refineries and surplus anodes from anode manufacturing facilities. The calcined alumina from alumina refineries is sold to aluminum smelters. The non-calcined hydrates from alumina refineries are sold to end-users other than smelters. The surplus anodes from anode manufacturing facilities can be sold to other aluminum smelters or end-users. The emissions tied to producing non-calcined hydrates and exported anodes shall be subtracted from the total emissions calculation.

In case of alumina refineries, they should determine the actual emissions intensity of aluminum hydroxide (also called aluminum trihydrate) to be used in the subtraction calculations. The calculation of emissions intensity of aluminum hydroxide involves determining the total emissions in the refinery, emissions tied to calcination, mass of aluminum hydroxide for exports, and mass of aluminum hydroxide for producing metallurgical-grade alumina before calcination. The emissions intensity of aluminum hydroxide is calculated by the total emissions in the refinery before calcination divided by the total amount of intermediate products (both for exports and smelters). An example of this calculation is provided in Exhibit 3. If the mass of aluminum hydroxide for calcination cannot be acquired, refineries can use the mass conversion factor, 1.53 *t aluminum hydroxide per t Alumina*,^{viii} to get the estimate.

Exhibit 3: Example Subtraction Calculation for Intermediate Product

Parameters	Aluminum hydroxide for calcination	Aluminum hydroxide for export
Hydroxide production emissions (Mt CO ₂)	12.0	
Aluminum hydroxide production (Mt)	15	5
Emissions intensity of aluminum hydroxide (t CO ₂ e/ t)	0.6 = 12.0 / (5+15)	
Alumina calcination emissions (Mt CO ₂)	5.0	
Total site emissions after subtraction (Mt CO ₂)	14.0 = 0.6 * 15 + 5.0	

When estimating GHG emissions from anode manufacturing facilities, any emissions associated with surplus anodes that are sold to other end-users shall be excluded. The emissions of the exported surplus anodes would instead be included in the emissions calculation of the end-users that purchase those anodes. Notably, while calculating the process GHG emissions from anode manufacturing, not all the carbon content of the input materials (pitch and coke) is converted to carbon anode and

^{viii} This conversion factor is based on the mass balance of aluminum hydroxide (Al(OH)₃) and alumina (Al₂O₃) in the aluminum calcination process (i.e., 2Al(OH)₃ → Al₂O₃ + 3H₂O).

CO₂. Some of the input material carbon content is also converted to carbon waste. This carbon waste is in a chemically stable form that will not convert to GHG emissions under proper waste management at the anode manufacturing facility.

Where a site does not have sufficient information to calculate the emissions intensity of the aforementioned exported products, the default emissions factor in Exhibit 4 can be used. If these factors are used in the emissions calculation, it will reduce the share of primary data (refer to [Section 3.6.5](#)).

Exhibit 4: Default Emission Factors for Exported Products

CO ₂ emissions source	Unit	Emissions factor (tCO ₂ e/unit) ^{ix}	Source
Bauxite	t	0.0084	IAI Scope 3 guidance (2023) ²⁶
Aluminum hydroxide	t	1.42	
Alumina	t	1.26	
Anode	t	1.75	
Liquid primary aluminum	t	13.01	
Primary cast ingot	t	16.48	

3.5.2 By-products used in other supply chains

Aluminum smelters can produce several by-products/waste such as red mud, dross, salt slag, spent-pot liner, sludge, and other carbon or non-carbon products. Some of these by-products may be recycled or used in other industries. Their use is regulated differently by every country. For example, red mud is not approved for use in the United States but is allowed in building materials in some countries in the European Union. These applications are also not significant. Based on these considerations, it was determined that GHG emissions associated with the use of any by-products currently produced by the aluminum industry shall not be credited in the emissions calculation.

3.5.3 Energy exports

Many aluminum producers, especially for alumina refinery owning onsite power generation, sell back a significant share of the produced electricity (and/or steam) to the wholesale energy market, large industrial consumers, distribution companies, and others. In this case, the sold energy and corresponding emissions shall be subtracted from the total energy emissions calculation. This can be done by determining the site-specific emissions factors and multiplying them by the quantity of the energy outputs sold.

^{ix} This refers to the cradle-to-gate emissions factor with transportation excluded.

Emissions allocation for Combined Heat and Power (CHP) plant

Some alumina refineries and aluminum smelters use CHP plants to generate electricity and steam (heat) onsite. Emissions for the electricity and steam outputs in a CHP plant shall be determined following the efficiency method for allocation in the GHG Protocol.^{x, 27}

$$E_H = \frac{H/e_H}{H/e_H + P/e_P} \times E_T \quad \text{and} \quad E_P = E_T - E_H$$

Source: GHG Protocol-CHP Guidance, 2006²⁸

where

E_P and E_H are the emissions allocated to electricity and steam production, respectively.

E_T is the total emissions of the CHP plant.

H is the steam output (kWh).

P is the generated electricity output (kWh).

e_P , e_H are the assumed efficiency values of typical power production and steam, respectively. Standard value for $e_H = 0.8$ and $e_P = 0.35$ is taken from the US EPA's GHG Protocol guidance document.²⁹

Emissions factors for electricity and steam output shall then be obtained by dividing the emissions related to electricity and steam from the CHP plant by the electricity and steam output from the plant (i.e., $\frac{E_P}{P}$ and $\frac{E_H}{H}$, respectively). These emissions factors shall be used to calculate corresponding emissions tied to sold energy from the CHP plant. Aluminum producers are encouraged to estimate site-specific efficiency values (e_H and e_P) for their CHP plant rather than using the standard assumed values. This can be done using the method described in Section 6.4.2.2 of IAI's [Aluminium Carbon Footprint Good Practice Guidance](#).³⁰

Emissions allocation for sold power

Aluminum producers often source electricity from multiple power suppliers (or have multiple on-site power generation facilities). They may resell the purchased or self-generated electricity through various means. If electricity is sold from a specific generation facility or through a specific contract defining the source, aluminum producers shall use the emissions factors specific to the generation facility or contractual agreement to calculate emissions tied to sold electricity. When surplus electricity is sold, producers shall calculate the weighted average emissions factors reflecting the actual emissions of sold energy.

^x This method is based on the assumption that the conversion of fuel energy to steam energy is more efficient than converting fuel to electricity.

A case example is provided in Exhibit 5 to show the emissions calculation for different power resale options. As the example illustrated, direct sale of self-generated electricity from plant 1 shall use its specific emissions factor to calculate emissions tied to sold electricity. The same applies to resale via contract for purchased source 3. If purchased energy is surplus and sold, the emissions shall be calculated based on the actual use of different purchased sources (e.g., 50 MWh from source 1, 100 MWh from source 2, and 50 MWh left from source 3) to calculate the weighted average emissions factor.

Exhibit 5: Calculation Example of Emissions Factors for Different Energy Resale Options^{xi}

Electricity Sources	Electricity generated/purchased (MWh)	Emissions factor (tCO ₂ e/MWh)	Self-used electricity (MWh)	Sold electricity (MWh)	Emissions factor for sold energy (tCO ₂ e/MWh)
Self-generation Plant 1	100	1.5	80	20 (direct sales)	1.5
Self-generation Plant 2	60	1	60	Not sold	-
Self-generation Plant 3	20	0.5	20	Not sold	-
Purchased Source 1	50	0.8	50	50 (sold surplus electricity)	0.5 = (50*0.8 + 100*0 + 50*1.2) / (50+100+50)
Purchased Source 2	100	0	100		
Purchased Source 3	150	1.2	50	100 (resold via contract)	1.2

3.6 Data Sources

3.6.1 Data quality

Although providing specific data quality requirement is beyond the scope of this guidance, reporting entities are encouraged to calculate a Data Quality Rating (DQR) metric. This communicates the relevance and reliability of the data sources that were used to calculate product emissions. Aluminum producers may refer to specific DQR metrics in other initiatives, such as the [WBCSD Pathfinder framework](#) and the [EU Product Environmental Footprint rules](#).³¹

^{xi} Note that this example only represents some power resale options. In practice, aluminum producers can decide their own resale options, but they should calculate the corresponding emissions factors for sold power following the method in this example.

3.6.2 Direct emissions factors

Direct emissions sources refer to fuel (solid, liquid, or gas) used on-site in the production of aluminum. Where possible, aluminum producers should determine the emissions factor of the specific fuel used on-site (this includes CH₄ and N₂O emissions released due to incomplete combustion as well as any other non-CO₂ GHG emissions). Where this is impossible, the standard emissions factors for various fuel types provided in Exhibits 6 and 7 can be used. The emissions factors provided below include CO₂, CH₄, and N₂O emissions converted to CO₂e using IPCC AR5 100-year Global Warming Potential (GWP) values. These emission factors refer to the emissions from fuel combustion. The emissions tied to the upstream of fuel combustion are discussed in [Section 3.6.4.2](#).

Exhibit 6: Direct Emissions Factors for Solid Fuel Sources

GHG emissions source	Unit	Emissions factor (tCO ₂ e/unit)	Source
Anthracite	t	2.64	IPCC, 2006 ³²
Coking coal	t	2.69	IPCC, 2019 ³³
Other bituminous coal	t	2.46	IPCC, 2006
Sub-bituminous coal	t	1.83	IPCC, 2006
Lignite	t	1.21	IPCC, 2006

Exhibit 7: Direct Emissions Factors for Liquid and Gas Fuel Sources

GHG emissions source	Unit	Emissions factor (kgCO ₂ e/unit)	Source
Heavy oil (residual fuel oil)	L	2.95	IPCC, 2006
Diesel	L	2.69	IPCC, 2006
LPG	L	1.62	IPCC, 2006
Natural gas	GJ	56.27	IPCC, 2006

Other direct inputs with carbon content are used in the aluminum smelting process. Two types of aluminum smelting techniques are used in the industry. The prebake smelting technique employed to make almost 95% of the aluminum manufactured each year uses prebaked blocks (made using petrol coke and pitch) as anodes. Furthermore, the Söderberg technique uses carbon briquettes (also made using petrol coke and pitch) in the anode. As with fuels, wherever possible, the carbon content of these inputs (like petrol coke and pitch) should be measured to determine a site-specific GHG emissions factor. Aluminum producers are encouraged to estimate the site-specific emissions factor using the method in the Aluminium Sector Greenhouse Gas Protocol.³⁴

Where this is impossible, the emissions factors in Exhibit 8 can be used. The emissions factors in Exhibit 8 for the prebake and Söderberg smelting techniques represent the process CO₂ emissions from the anode and paste used. The emissions factor for petrol coke, anode baking, lime, and soda ash represents the process CO₂ emissions from the use of these inputs in aluminum production.

Exhibit 8: Direct Emissions Factors for Other Inputs^{xii}

GHG emissions source	Unit	Emissions factor (tCO ₂ e/unit)	Source
Petrol coke calcination	t green coke	0.22	IAI-GHG Protocol Al sector tool, 2015 ³⁵
Anode baking	t baked anode	0.23	
Prebake process anode consumption	t anode consumed	3.61	
Söderberg process paste consumption	t paste consumed	3.52	
Soda ash consumption	t soda ash	0.39	
Lime calcination	t lime	0.78	

In addition to process CO₂ emissions, the aluminum smelting process also releases perfluorocarbon (PFC) emissions — another class of GHGs. These PFCs are emitted during a phenomenon called “anode effect” when the alumina ore content in the smelting process is below the optimal level required to produce aluminum. During this “anode effect” stage, tetrafluoromethane (CF₄) and hexafluoroethane (C₂F₆) are the two PFCs generated.³⁶ Wherever possible, the PFC emissions from the smelting process shall be determined using site-specific parameters (see [IAI-GHG Protocol Al sector tool](#), 2015). The PFC emissions shall be multiplied with their respective Global Warming Potential (GWP) values to obtain a site-specific GHG emissions factor. For reference, over 100 years, CF₄ has a GWP of 6,630 times that of CO₂, and C₂F₆ has a GWP value of 11,100 times that of CO₂.³⁷ Where this is impossible, the emissions factors in Exhibit 9 can be used.

Exhibit 9: Emissions Factors for PFC

Process	Unit	PFC type		Emissions factor (tCO ₂ e/unit)	Source
		CF ₄ (kg/unit)	C ₂ F ₆ (kg/unit)		
Center work prebake	t Al	0.4	0.04	3.1	IAI-GHG Protocol Al sector tool, 2015 ³⁸
Side work prebake	t Al	1.6	0.4	15.05	
Vertical stud Söderberg	t Al	0.8	0.04	5.75	
Horizontal stud Söderberg	t Al	0.4	0.03	2.98	

3.6.3 Electricity emissions factors

Whenever possible, aluminum producers shall obtain the relevant life-cycle GHG emissions factors for electricity used at the production facility. These emissions factors shall be obtained from electricity suppliers. This life-cycle GHG emissions factor includes emissions from the extraction, production, and transportation of the fuels used in electricity generation. It includes the emissions associated with construction and the raw materials used for constructing the electricity generation facility. It also includes emissions associated with transmission and distribution (T&D) loss occurring between the electricity generation facility and the aluminum production facility (see Section 6.4 of IAI’s [Aluminium Carbon Footprint Good Practice Guidance](#)³⁹).

^{xii} CO₂ emissions from fuel combustion are excluded. These should be added following the calculation method for fuel use.

If the electricity used at an aluminum production facility is self-generated, the lifecycle GHG emissions factor associated with the self-generation facility shall be used. When this is impossible, default emissions factors in Exhibit 10 can be used depending on the fuel mix of the electricity at the self-generation facility.

Exhibit 10: Life-cycle GHG Emissions Factors from Electricity Sources

Fuel source	Unit	Emissions factor (tCO ₂ e/unit)	Source
Coal	MWh	0.82	IPCC AR5 WG 3, 2014 ⁴⁰
Gas	MWh	0.50	IPCC AR5 WG 3, 2014
Other fossil	MWh	0.78	IPCC AR5 WG 3, 2014
Nuclear	MWh	0.01	IPCC AR5 WG 3, 2014
Hydro	MWh	0.02	IPCC AR5 WG 3, 2014
Wind	MWh	0.01	IPCC AR5 WG 3, 2014
Solar	MWh	0.05	IPCC AR5 WG 3, 2014
Bioenergy	MWh	0.23	IPCC AR5 WG 3, 2014
Other renewables	MWh	0.06	IPCC AR5 WG 3, 2014

If purchased electricity was used to the extent possible, aluminum producers shall obtain the fuel mix and life-cycle GHG emissions factors (including T&D loss) for the regional grid from which their electricity was purchased. If this is unavailable, they shall rely on fuel mix and life-cycle emissions data of the national grid in which they operate. They shall obtain such data from country-specific data sources. If the fuel mix of the electricity used by aluminum producers is unknown, aluminum producers can use national-level electricity fuel mix data from credible data providers. This fuel mix data can then be used along with the IPCC life-cycle GHG emissions factors and the estimated T&D loss for individual sources to obtain the GHG emissions factor for the grid electricity purchased by an aluminum producer.

3.6.4 Indirect emissions factors

Indirect emissions factors refer to the GHG emissions that occur during the production of input material as opposed to the GHG emissions that come from the carbon content of a fuel or other inputs that are combusted. These factors can be used to estimate the emissions for processes not operated by the aluminum producer but required as part of the fixed boundary.

Wherever possible, aluminum producers should request actual emissions from the supplier or customer that operates these processes instead of using the standard emissions factors. Where the emissions factors listed in this section are used, the primary data share will be reduced (see [Section 3.6.5](#)). Using data directly from suppliers avoids this issue.

Emissions from purchased goods and off-site processing

Processes that may not be directly operated by the aluminum producer include those required to make the inputs used in aluminum manufacturing. These processes include mining for bauxite, limestone, production of calcined lime, and caustic soda. Calcined lime, caustic soda, and bauxite are used in alumina refining from which alumina is made. This alumina is an important input in the aluminum manufacturing process along with aluminum fluoride and soda ash. Carbon anodes, which are another important input in the aluminum manufacturing process, are made using calcined petroleum coke and coal tar pitch. If the aluminum producer does not operate these processes, data for the embodied emissions of these materials should be obtained from suppliers. Where this is impossible, the default emissions factors for purchased goods in Exhibit 11 and

emissions factors for potential off-site processing in Exhibit 12 can be used. However, the actual emissions factor for these materials will vary depending on the specific processing technologies, fuels, and electricity source used.

Exhibit 11: Cradle-to-Gate Emissions Factors for Purchased Goods

Embodied emissions of purchased materials	Unit	Emissions factor (tCO ₂ e/unit)	Source
Bauxite	t Bauxite	0.0084	IAI Scope 3 Calculation Tool ⁴¹
Caustic soda	t NaOH	1.12	
Calcined lime	t CaO	0.79	
Sulfuric acid	t sulfuric acid	0.14	
Calcined Petrol Coke (CPC)	t petrol coke	1.88	
Coal Tar Pitch (CTP)	t coal tar pitch	2.62	
Anode	t anode	1.75	
Alumina	t alumina	1.26	
Sodium carbonate	t Na ₂ CO ₃	0.41	
Steel (cathodes)	t steel	1.89	
Liquid aluminum	t Al	13.01	
Aluminum fluoride	t AlF ₃ produced	1.02	Peng et al., 2019 ⁴²

Exhibit 12: Indirect Emissions Factors for Potential Off-site Processing

Process	Unit	Emissions factor (tCO ₂ e/unit)	Source
Limestone mining	t limestone	0.003 ^{xiii}	US DOE, 2003 ⁴³
Ingot casting	t ingot	0.139	IAI Scope 3 Calculation Tool ⁴⁴
Rolling	t semis	0.43	IAI Scope 3 Calculation Tool ⁴⁵
Extrusion	t semis	0.68	IAI Scope 3 Calculation Tool ⁴⁶
Scrap remelting/refining	t recovered aluminum	0.53	Aluminum Association, 2022 ⁴⁷

Indirect emissions from fuels

The production process for each fuel also involves emissions, including those from the production, processing, and transport of fuels. Among these emissions, fugitive methane is the most notable, particularly for coal and natural gas production. Given that the fuel production processes are covered in the fixed boundary, these emissions must also be reported. Where possible, the fuel provider should determine upstream emissions for fuel and provide this information to the aluminum producer. Where this is impossible, the aluminum producer may use the standard emissions factor provided in Exhibit 13. For fugitive methane

^{xiii} The non-CO₂ GHG emissions for this process are not provided in the source document. Hence, these values represent just the CO₂ emissions. The non-CO₂ GHG emissions could be minimal and can be estimated from the amount and type of fuel used in the process.

emissions, aluminum producers may request their fuel producers to use an existing standard (such as the MiQ standard for natural gas or the EPA subpart FF methodology for coal⁴⁸) to determine the methane emissions. More details are described in the next section.

Exhibit 13: Upstream Emissions Factors for Fuel Sources

GHG emissions source	Emissions factor (tCO ₂ e/TJ) ^{xiv}	Source
Natural gas	8.7	IAI Scope 3 Calculation Tool ⁴⁹
Coal	14.7	
Heavy fuel oil	11.2	
Light fuel oil	11.2	
LPG	7.03	
Diesel	16.36	
Gasoline	17.29	
Propane	6.95	

To convert natural gas from mass units to energy units, it can be assumed that a metric ton of natural gas is equivalent to 55.58 GJ of energy and 1470.3 cubic meters.

Fugitive methane

Fugitive methane refers to the methane gas released into the atmosphere during coal mining and along the natural gas supply chain. The fugitive methane emissions from coal mining come from the methane that is trapped in the coal seams and escapes during the mining process. The amount of methane released during the coal mining process depends on various factors such as the type of coal being mined, mine depth, and method of mining. Typical values of emissions factors for fugitive methane emissions from coal mines are given in Exhibit 14 below. These values are only estimates, and the actual values can vary as much as ±15%.

Fugitive methane emissions can also come from different stages in the natural gas supply chain, such as production, processing, transmission, and distribution. About 1.3%–2.2% of the natural gas supplied to end consumers escapes into the atmosphere as fugitive methane. The emissions factor associated with fugitive methane emissions from the natural gas supply chain is given in Exhibit 14 below (assuming average fugitive emissions are 1.7% of the total natural gas supplied to the end-user).

GHG emissions factors are provided for both 20-year and 100-year timeframes. According to the Fifth Assessment Report of the IPCC, methane has a Global Warming Potential (GWP) of 28 times that of CO₂ over 100 years and a GWP of 84 times that of CO₂ over 20 years.⁵⁰ To align with the latest IPCC reporting, aluminum producers shall use the 100-year GWP in reporting emissions. However, aluminum producers shall also consider the short-term climate impact of methane when prioritizing emissions abatement strategies.

^{xiv} To convert the emissions factors from a unit energy basis to a unit mass or volume basis, use energy density values from standard sources like the GHG Protocol's "Emission Factors from Cross-Sector Tools" spreadsheet.

Exhibit 14: Fugitive Methane Emissions Factors

Process	Unit	Fugitive methane emissions (m ³ /unit)	Emissions factor (tCO ₂ e/unit)		Source
			20-year GWP	100-year GWP	
Coal – Surface mining	kg coal	0.006	0.34	0.11	Kholod et al., 2020 ⁵¹
Coal – Underground mining	kg coal	0.019	1.08	0.36	Kholod et al., 2020
Natural gas	m ³ NG	0.017	0.97	0.32	Littlefield et al., 2017 ⁵²

There is considerable variability in the amount of fugitive methane emissions, meaning these factors may underestimate the emissions from a specific supply chain. A wide range of sensors and other methane monitoring equipment could be deployed to measure fugitive methane emissions at the facility and source level and at various time periods.⁵³ Aluminum producers are encouraged to seek fugitive methane data collected using these various methane monitoring technologies by their suppliers. Aluminum producers can also make use of the MiQ standard to lower the fugitive emissions of supplied gas.

3.6.5 Primary data share

As noted above, in many cases, the use of secondary emissions factors can result in inaccuracies in the overall emissions intensity. This is due to the variability in emissions observed in the processes. This variability can occur depending on the process type and fuel (and/or energy) sources used for the process.

To incentivize the use of primary data, its share used to calculate the intensity must be reported alongside the full boundary (mine to semi-fabrication) emissions intensity calculated using this framework. This is defined as the share of the emissions intensity that did not rely on the secondary emissions factors provided in this guidance. Specifically, it is calculated as follows:

$$Primary\ Data\ Share\ (\%) = \frac{Emissions\ based\ on\ primary\ data\ (CO_2e)}{Total\ emissions\ (CO_2e)}$$

Note that this is consistent with the primary data calculation required under the WBSCD’s Pathfinder framework.⁵⁴

The emissions associated with a process are the product of activity data and emissions factor data. To consider certain emissions “primary,” both activity data and emissions factor data shall be from primary sources. In most cases, activity data (i.e., amount of fuel, energy, and materials used to produce aluminum) is based on primary sources (i.e., measured consumption at the aluminum production facility). As a result, the definition of primary emissions is determined by the type of emissions factor used. The relevant definitions are provided in Exhibit 15. Considering the challenge in acquiring primary data for upstream production emissions of fuels, this guidance recommends interpreting the primary data share within 5% difference with the same level of credibility.

Exhibit 15: Primary Data Definitions

Activity type		Primary data definition	Secondary data definition
Fuels	Combustion/Use	Supplier data preferred Standard emissions factors (IAI, IPCC, EPA, etc.) as provided in this guidance or measured carbon content	Not applicable
	Production	Supplier data	Emissions factors in Section 3.6.4.2 or databases listed in Pathfinder
Other material input		Supplier data	Emissions factors in Section 3.6.4.1 or databases listed in Pathfinder
Imported heat		Supplier data	Emissions factor based on assumed fuel source for heat
Electricity		For on-site generation: Primary data For purchased electricity: Supplier (utility) data or via registered and retired certificate ^{xv} Regional location-based grid emissions factor ^{xvi}	Country or global grid emissions factor


This guidance proposes to define standard EFs for fuel combustion as the primary source considering these emissions are well standardized at the international or regional level, but the Horizon Zero aluminum working group did not reach a consensus on whether fuel combustion EFs should be considered primary data.

^{xv} Note that certificate mechanism only includes contractual instruments that fulfill the high-quality criteria (or follow the decision hierarchy) identified in section 3.4.1.2.

^{xvi} Note that where the connected grid covers an entire country, the country grid factor may be considered primary data.

APPENDIX: Calculation Examples for [Section 3.3.3](#)

Exhibit A1: Product Systems for Illustrating Cut-off and Co-product Allocation Method

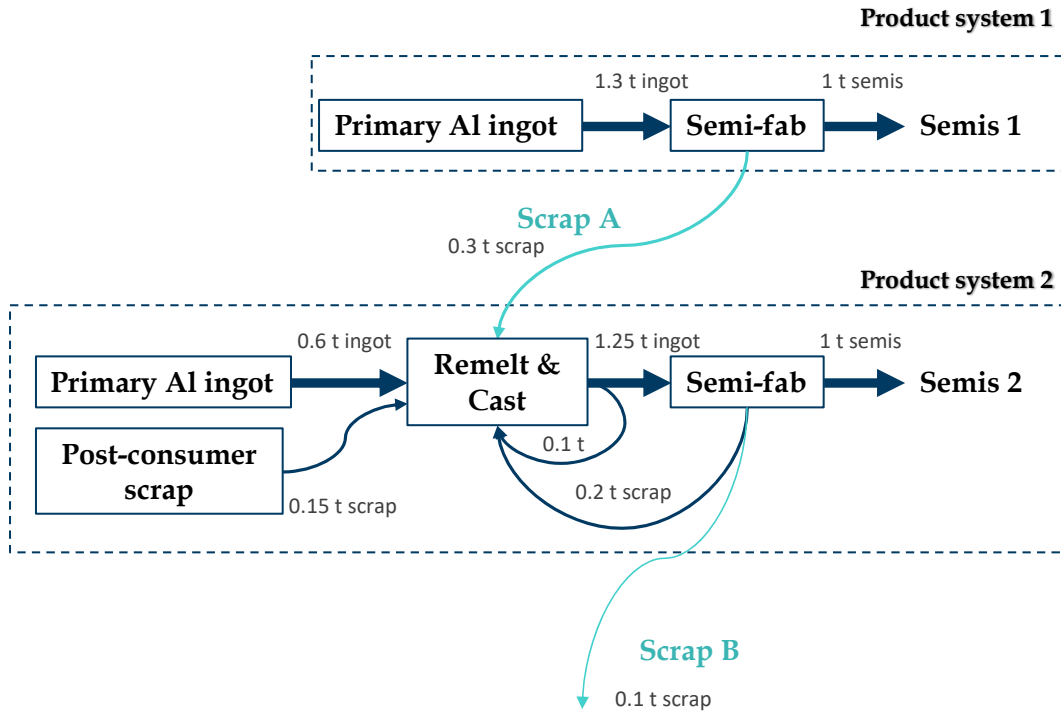

Cut-off approach:

Product system 1 Input flow/process	Emissions Intensity (t CO ₂ e/ t Al)	Process emissions (t CO ₂ e)		
		Total emissions	Semis 1	Scrap A
Primary Al ingot	4	5.2	5.2	0
Semi-fab	0.5	0.5	0.5	0
Total			5.7	0
Calculated PCF (t CO₂e/ t Al)			5.7	0

Product system 2 Input flow/process	Emissions Intensity (t CO ₂ e/ t Al)	Process emissions (t CO ₂ e)		
		Total emissions	Semis 2	Scrap B
Primary Al ingot	9	5.4	5.4	0
Post-consumer scrap	0	0	0	0
Scrap A	0	0	0	0
Remelt & recycled	0.3	0.41	0.41	0
Semi-fab	0.5	0.5	0.5	0
Total			6.31	0
Calculated PCF (t CO₂e/ t Al)			6.31	0

Co-product allocation approach:

Product system 1	Emissions Intensity (t CO ₂ e/ t Al)	Process emissions (t CO ₂ e)		
Input flow/process		Total emissions	Semis 1	Scrap A
Primary Al ingot	4	5.2	$5.2 * 1 / (1+0.3) = 4$	$5.2 * 0.3 / (1+0.3) = 1.2$
Semi-fab	0.5	0.5	0.5	0
Total			4.5	1.2
Calculated PCF (t CO₂e/ t Al)			4.5	$1.2 / 0.3 = 4$

Product system 2	Emissions Intensity (t CO ₂ e/ t Al)	Process emissions (t CO ₂ e)		
Input flow/process		Total emissions	Semis 2	Scrap B
Primary Al ingot	9	5.4	$5.4 * 1 / (1+0.1) = 4.91$	$5.4 * 0.1 / (1+0.1) = 0.49$
Post-consumer scrap	0	0	0	0
Scrap A	4	1.2	$1.2 * 1 / (1+0.1) = 1.09$	$1.2 * 0.1 / (1+0.1) = 0.11$
Remelt & recycled	0.3	0.4	$0.4 * 1 / (1+0.1) = 0.37$	$0.4 * 0.1 / (1+0.1) = 0.04$
Semi-fab	0.5	0.5	0.5	0
Total			6.87	0.64
Calculated PCF (t CO₂e/ t Al)			6.87	$0.64 / 0.1 = 6.4$

Consistency check:

If the same approach has been applied to all products, the total emissions sums will be consistent across methods, representing no emission leakage.

Approach	Semis 1 (t CO ₂ e)	Semis 2 (t CO ₂ e)	Scrap B (left systems) (t CO ₂ e)	Sum (t CO ₂ e)
Cut-off	5.7	6.31	0	12.01
Co-production allocation	4.5	6.87	0.64	12.01

ENDNOTES

-
- ¹ “1.5 Degrees Scenario: A Model To Drive Emissions Reduction” IAI, October 2021. <https://international-aluminium.org/resource/1-5-degrees-scenario-a-model-to-drive-emissions-reduction/>.
- ² “RMI Horizon Zero” RMI, Accessed April 5, 2023. <https://rmi.org/our-work/climate-intelligence/horizon-zero/>.
- ³ “Pathfinder Framework Version 2.0” WBCSD, January 2023. <https://www.wbcsd.org/PFV2.0>.
- ⁴ *Greenhouse Gas Protocol: A Corporate Accounting and Reporting Standard*, WRI/WBCSD GHG Protocol, March 2004. <https://ghgprotocol.org/sites/default/files/standards/ghg-protocol-revised.pdf>.
- ⁵ “1.5 Degrees Scenario” IAI, October 2021. <https://international-aluminium.org/resource/1-5-degrees-scenario-a-model-to-drive-emissions-reduction/>.
- ⁶ “Global Logistics Emissions Council (GLEC) Framework for Logistics Emissions Accounting and Reporting Version 2.0” Smart Freight Centre, July 2022. <https://www.smartfreightcentre.org/en/how-to-implement-items/what-is-glec-framework/58/>.
- ⁷ “1.5 Degrees Scenario” IAI, October 2021. <https://international-aluminium.org/resource/1-5-degrees-scenario-a-model-to-drive-emissions-reduction/>.
- ⁸ *The Aluminum Sector Greenhouse Gas Protocol*, WRI/WBCSD GHG Protocol, October 2006. https://ghgprotocol.org/sites/default/files/aluminium_1.pdf.
- ⁹ *Aluminium Carbon Footprint Technical Support Document*, IAI, February 2018. <https://www.international-aluminium.org/wp-content/uploads/2021/03/Aluminium-Carbon-Footprint-Technical-Support-Document.pdf>.
- ¹⁰ *Good Practice Guidance for Calculation of Primary Aluminium and Precursor Product Carbon Footprints v2.0*, IAI, August 2021. https://international-aluminium.org/wp-content/uploads/2021/08/CF-Good-Guidance-v2_final-2021.pdf.
- ¹¹ *Good Practice Guidance: Measuring Perfluorocarbons*, IAI, December 2020. https://international-aluminium.org/wp-content/uploads/2021/03/iai_good_practice_guidance_measuring_perfluorocar.pdf.
- ¹² *Reference Document on Carbon Footprint Calculations of Aluminium Scrap*, IAI, January 2023. <https://international-aluminium.org/wp-content/uploads/2023/01/Carbon-footprint-of-recycled-aluminium-IAI-Document-Public-Review-Final.pdf>.
- ¹³ *Reference Document on Carbon Footprint Calculations of Aluminium Scrap*, IAI, January 2023. <https://international-aluminium.org/wp-content/uploads/2023/01/Carbon-footprint-of-recycled-aluminium-IAI-Document-Public-Review-Final.pdf>.
- ¹⁴ *ISO 14021:2016 Environmental Labels and Declarations — Self-Declared Environmental Claims (Type II Environmental Labelling)*, International Organization for Standardization (ISO), March 2016. <https://www.iso.org/standard/66652.html>.
- ¹⁵ *Reference Document on Carbon Footprint Calculations of Aluminium Scrap*, IAI, January 2023. <https://international-aluminium.org/wp-content/uploads/2023/01/Carbon-footprint-of-recycled-aluminium-IAI-Document-Public-Review-Final.pdf>.
- ¹⁶ “Aluminium Sector Greenhouse Gas Pathways to 2050” IAI, September 2021. <https://international-aluminium.org/resource/aluminium-sector-greenhouse-gas-pathways-to-2050-2021/>.
- ¹⁷ “Guidelines on Transparency - Aluminium Scrap” IAI, September 2022. <https://international-aluminium.org/resource/guidelines-on-transparency-aluminium-scrap/>.

-
- ¹⁸ *Making Net-Zero Aluminium Possible*, Mission Possible Partnership (MPP), September 2022. <https://missionpossiblepartnership.org/wp-content/uploads/2022/09/Making-1.5-Aligned-Aluminium-possible.pdf>.
- ¹⁹ *Reference Document on Carbon Footprint Calculations of Aluminium Scrap*, IAI, January 2023. <https://international-aluminium.org/wp-content/uploads/2023/01/Carbon-footprint-of-recycled-aluminium-IAI-Documents-Public-Review-Final.pdf>.
- ²⁰ *Reference Document on Carbon Footprint Calculations of Aluminium Scrap*, IAI, January 2023. <https://international-aluminium.org/wp-content/uploads/2023/01/Carbon-footprint-of-recycled-aluminium-IAI-Documents-Public-Review-Final.pdf>.
- ²¹ “IAI Scope 3 Calculation Tool & Guidance” IAI, November 2022. <https://international-aluminium.org/resource/iai-scope3-calculation-tool-and-guidance/>.
- ²² *Good Practice Guidance for Calculation of Primary Aluminium*, IAI, August 2021. https://international-aluminium.org/wp-content/uploads/2021/08/CF-Good-Guidance-v2_final-2021.pdf.
- ²³ *Good Practice Guidance for Calculation of Primary Aluminium*, IAI, August 2021. https://international-aluminium.org/wp-content/uploads/2021/08/CF-Good-Guidance-v2_final-2021.pdf.
- ²⁴ *GHG Protocol Scope 2 Guidance*, WRI/WBCSD GHG Protocol, 2015. <https://ghgprotocol.org/sites/default/files/2023-03/Scope%20%20Guidance.pdf>.
- ²⁵ *Good Practice Guidance for Calculation of Primary Aluminium*, IAI, August 2021. https://international-aluminium.org/wp-content/uploads/2021/08/CF-Good-Guidance-v2_final-2021.pdf.
- ²⁶ “IAI Scope 3 Calculation Tool & Guidance” IAI, November 2022. <https://international-aluminium.org/resource/iai-scope3-calculation-tool-and-guidance/>.
- ²⁷ *Allocation of GHG Emissions from a Combined Heat and Power (CHP) Plant*, WRI/WBCSD GHG Protocol, September 2006. https://ghgprotocol.org/sites/default/files/CHP_guidance_v1.0.pdf.
- ²⁸ *Allocation of GHG Emissions from a Combined Heat and Power (CHP) Plant*, WRI/WBCSD GHG Protocol, September 2006. https://ghgprotocol.org/sites/default/files/CHP_guidance_v1.0.pdf.
- ²⁹ *Indirect Emissions from Purchases/Sales of Electricity and Steam*, Climate Leaders Greenhouse Gas Inventory Protocol Core Module Guidance, October 2004. <https://nepis.epa.gov/Exe/ZyPURL.cgi?Dockkey=P1004NA2.TXT>.
- ³⁰ *Good Practice Guidance for Calculation of Primary Aluminium*, IAI, August 2021. https://international-aluminium.org/wp-content/uploads/2021/08/CF-Good-Guidance-v2_final-2021.pdf.
- ³¹ “Pathfinder Framework Version 2.0” WBCSD, January 2023. <https://www.wbcscd.org/PFV2.0>; and *Product Environmental Footprint Category Rules (PEFCR) for Metal Sheets for Various Applications*, European Commission, June 2019. https://wayback.archive-it.org/1495/20221004164603/https://ec.europa.eu/environment/eussd/smgp/pdf/2019-06-28_PEFCR_Metal_Sheets_final.pdf.
- ³² “2006 IPCC Guidelines for National Greenhouse Gas Inventories, Volume 2, Chapter 2: Stationary Combustion” Intergovernmental Panel on Climate Change (IPCC), 2006. <https://www.ipcc-nggip.iges.or.jp/public/2006gl/vol2.html>.
- ³³ *2019 Refinement to the 2006 IPCC Guidelines for National Greenhouse Gas Inventories, Volume 3 Chapter 4 Metal Industry Emissions*, Intergovernmental Panel on Climate Change (IPCC), 2019. https://www.ipcc-nggip.iges.or.jp/public/2019rf/pdf/3_Volume3/19R_V3_Ch04_Metal_Industry.pdf.

³⁴ *The Aluminum Sector Greenhouse Gas Protocol*, WRI/WBCSD GHG Protocol, October 2006. https://ghgprotocol.org/sites/default/files/aluminium_1.pdf.

³⁵ “IAI-GHG Protocol Aluminum Sector Tool, Version 2.1” WRI/WBCSD GHG Protocol, May 2015. https://ghgprotocol.org/sites/default/files/2023-03/Aluminium%20Sector%20GHG%20Workbook%20-%20version%202_1_0.xls.

³⁶ “Aluminum Industry” US EPA Overviews and Factsheets, 2016. <https://www.epa.gov/f-gas-partnership-programs/aluminum-industry>.

³⁷ *Climate Change 2013: The Physical Science Basis. Contribution of Working Group I to the Fifth Assessment Report of the Intergovernmental Panel on Climate Change Chapter 8: Anthropogenic and Natural Radiative Forcing*, Intergovernmental Panel on Climate Change (IPCC), 2013.

³⁸ “IAI-GHG Protocol Aluminum Sector Tool, Version 2.1” WRI/WBCSD GHG Protocol, May 2015. https://ghgprotocol.org/sites/default/files/2023-03/Aluminium%20Sector%20GHG%20Workbook%20-%20version%202_1_0.xls.

³⁹ *Good Practice Guidance for Calculation of Primary Aluminium*, IAI, August 2021. https://international-aluminium.org/wp-content/uploads/2021/08/CF-Good-Guidance-v2_final-2021.pdf.

⁴⁰ *Annex III: Technology-Specific Cost and Performance Parameters. In: Climate Change 2014: Mitigation of Climate Change. Contribution of Working Group III to the Fifth Assessment Report of the Intergovernmental Panel on Climate Change*, Intergovernmental Panel on Climate Change (IPCC), 2014.

⁴¹ “IAI Scope 3 Calculation Excel Tool” IAI, November 2022. <https://international-aluminium.org/wp-content/uploads/2022/11/IAI-Scope-3-Calculation-Tool.xlsm>.

⁴² Peng, Tianduo, Xunmin Ou, Xiaoyu Yan, and Gehua Wang, *Life-Cycle Analysis of Energy Consumption and GHG Emissions of Aluminium Production in China*, Energy Procedia, Innovative Solutions for Energy Transitions, 158 (February 1, 2019): 3937–43. <https://doi.org/10.1016/j.egypro.2019.01.849>.

⁴³ *Energy and Emission Reduction Opportunities for the Cement Industry*, U.S. Department of Energy, December 29, 2003. https://www1.eere.energy.gov/manufacturing/industries_technologies/imf/pdfs/eeroci_dec03a.pdf.

⁴⁴ “IAI Scope 3 Calculation Tool & Guidance” IAI, November 2022. <https://international-aluminium.org/resource/iai-scope3-calculation-tool-and-guidance/>.

⁴⁵ “IAI Scope 3 Calculation Excel Tool” IAI, November 2022. <https://international-aluminium.org/wp-content/uploads/2022/11/IAI-Scope-3-Calculation-Tool.xlsm>.

⁴⁶ “IAI Scope 3 Calculation Excel Tool” IAI, November 2022. <https://international-aluminium.org/wp-content/uploads/2022/11/IAI-Scope-3-Calculation-Tool.xlsm>.

⁴⁷ *The Environmental Footprint of Semi-Fabricated Aluminum Products in North America*, The Aluminum Association, January 2022. https://www.aluminum.org/sites/default/files/2022-01/2022_Semi-Fab_LCA_Report.pdf.

⁴⁸ “The MiQ Standard” MiQ, Accessed April 9, 2023. <https://miq.org/the-technical-standard/>; “40 CFR Part 98 Mandatory Greenhouse Gas Reporting Subpart FF -- Underground Coal Mines” US EPA, 2010. <https://www.ecfr.gov/current/title-40/chapter-I/subchapter-C/part-98/subpart-FF>.

⁴⁹ “IAI Scope 3 Calculation Excel Tool” IAI, November 2022. <https://international-aluminium.org/wp-content/uploads/2022/11/IAI-Scope-3-Calculation-Tool.xlsm>.

⁵⁰ *Climate Change 2013: The Physical Science Basis. Contribution of Working Group I to the Fifth Assessment Report of the Intergovernmental Panel on Climate Change Chapter 8: Anthropogenic and Natural Radiative Forcing*, Intergovernmental Panel on Climate Change (IPCC), 2013.

⁵¹ Kholod, Nazar, Meredydd Evans, Raymond C. Pilcher, Volha Roshchanka, Felicia Ruiz, Michael Coté, and Ron Collings, *Global Methane Emissions from Coal Mining to Continue Growing Even with Declining Coal Production*, *Journal of Cleaner Production* 256 (May 20, 2020): 120489. <https://doi.org/10.1016/j.jclepro.2020.120489>.

⁵² Littlefield, James A., Joe Marriott, Greg A. Schivley, and Timothy J. Skone, *Synthesis of Recent Ground-Level Methane Emission Measurements from the U.S. Natural Gas Supply Chain*, *Journal of Cleaner Production* 148 (April 1, 2017): 118–26. <https://doi.org/10.1016/j.jclepro.2017.01.101>.

⁵³ *Improving Characterization of Anthropogenic Methane Emissions in the United States*, National Academies of Sciences, Engineering, 2018. <https://doi.org/10.17226/24987>.

⁵⁴ “Pathfinder Framework Version 2.0” WBCSD, January 2023. <https://www.wbcd.org/PFV2.0>.